

The Hose Reel is swinging, this reduces the wear and tear of the hose and helps its pulling out.

Elbow connector M1/2" threaded with check valve (comp. EN 1717)


Casing and mounting frame in stainless steel AISI 304 fine glazed.

Thermoplastic anti-friction rollers against hose wear and tear.

Possibility to regulate the loading of the retraction spring.

Retractable hose (6 m. long) in special rubber mixture in EPDM coated with a blue protection sheet. This material is in accordance with FDA specifications required for Drinking Water.

Spray-gun mod. "Nito-1"

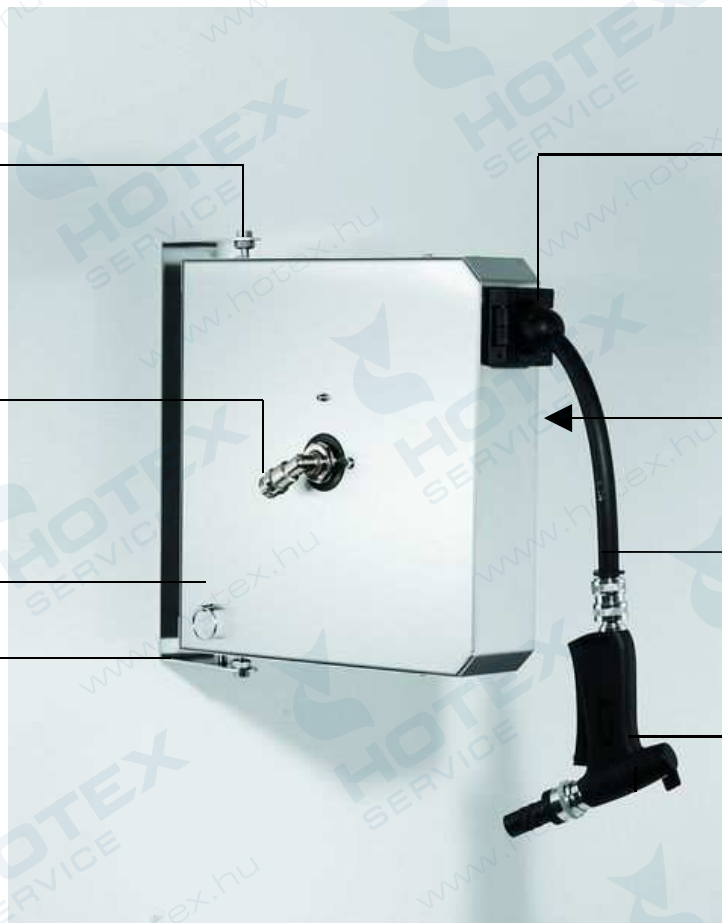

### **SPRAY GUN NITO-1**

**"Spray-Gun" for light industrial sectors.**

- Adjustable jet by the front end of the gun, from narrow jet to wide spray pattern
- Complete flow control from low to high
- Trigger with on/off and lock function
- Ergonomically correct design (weight 295 g)
- Further accessory: Jet extension L. 45 cm.

**Water pressure:** Max 6 bar at 40°C (min. 2,5 bar)

Max 4 bar at 60°C (min. 2,5 bar)

**Water temperature:** Max 60° C

**Water Output:** 8,5 l/min with narrow jet (at 3 bar)

10,5 l/min. with wide spray (at 3 bar)

**5R.M06Q.146**

**MIDIReel with automatic retraction system (hose 6m.) and spray gun**