

FXBCF 10-35 BLAST CHILLER-FREEZER

External dimensions

W 745 x D 810 x H 1480 mm
Depth door open: 1495 mm

Internal dimensions

W 645 x D 410 x H 730 mm

Volume

193 Litres

Performance

35 kg de +70°C to +3°C chill capacity
15 kg de +70°C to -18°C freeze capacity

Loading

10 x GN 1/1 pans or shelves (optional) or
10 x 600 x 400 mm shelves (optional)

Internal format

Dual format
GN 1/1 (D 325 x W 530 mm) and
600 x 400 (D 400 x W 600 mm)
compatibility

Interior fittings


2 removable stainless steel wire racks with
10 shelf/pan positions pitched at 60 mm
intervals

Electrics

Duty absorbed: 1330 W

Voltage


230/1/50

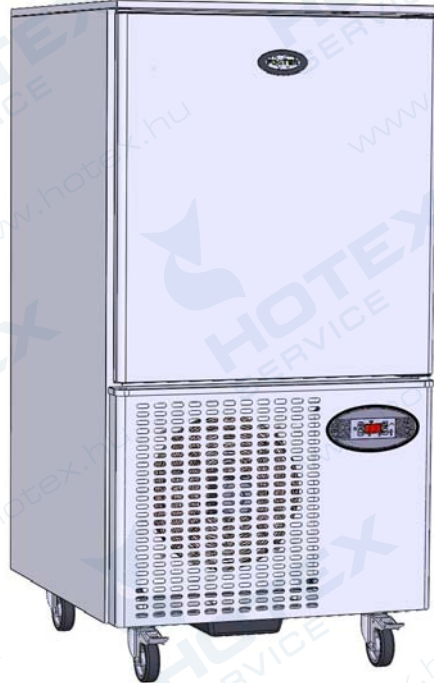

Electronic controller with digital temperature display



Easily removable one piece stainless steel wire racking

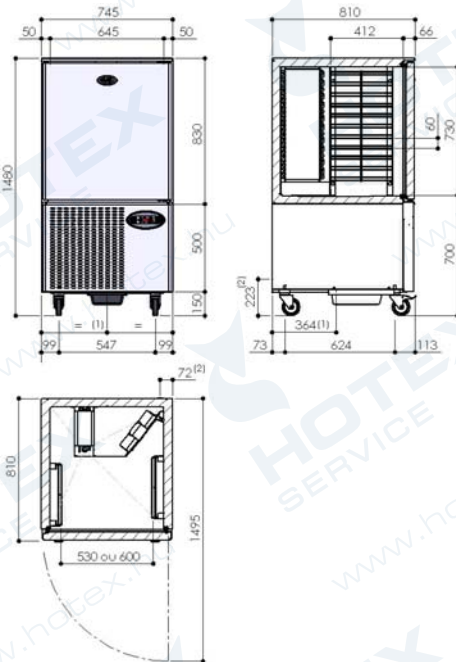

Construction

- Rigid in-situ foamed single piece shell
- High density CFC/HCFC free polyurethane foam
- Insulation thickness 50 mm
- 304 stainless steel exterior and interior finish
- No visible screws or fixings
- 15 mm radiused interior
- 304 stainless steel base with drain fitting
- Fully removable one-piece stainless steel wire racking to either side
- High efficiency thermal breaks
- Fully removable door gasket
- Right hand hinged door as standard (left hand hinged on request) with built-in handle design
- Self closing door with full 180° opening
- Lockable castors (2 braked/2 unbraked)

Refrigeration System

- Under mounted 43°C ambient condensing unit
- Extraction rate 1890 W @ -10°C
- CFC/HCFC free refrigerant R404A
- Ceiling mounted double-coated evaporator coil
- Vertical fins with large pitch for frost-free operation
- 1 x 250 mm Ø fan motor mounted on stainless steel housing (1600 m3/h air flow)

Control panel

- Flush fitting control panel
- Smooth, easy to clean fascia with 4 touch sensitive keys
- 2 programme selection keys (chill or freeze)
- Simple to use
- Probe controlled feature with core temperature read-out or
- Fully programmable timed cycle
- End of cycle buzzer
- Automatic hold function after completion of chill/freeze cycle
- Manual defrost cycle

Standards

- CE marked for low voltage and EMC
- ACD 40003 H (EU standard) compliant
- ISO 9001 Quality Management System
- ISO 14001 Environmental certification

Options

- 4 adjustable stainless steel legs
- Special voltage 208/115V 60 Hz
- S/S GN 1/1 pans or shelves
- S/S 600 x 400 mm shelves
- Remote less condensing unit



FOSTER REFRIGERATOR EXPORT DEPT
Oldmedow Road

KING'S LYNN

Norfolk PE30 4JU

England

Telephone: + 44 1553 780500

Fax: + 44 1553 768409

E-mail: export@foster-uk.com

www.fosterrefrigerator.co.uk



This document is not contractual. We reserve the right to modify our product without prior notice.