

Waste Compaction

Impactor Waste Compactors



IP700

- Compacts waste into a 240-litre wheelie bin • No bags to handle for even greater convenience
- Reduces waste volume by up to 80% • Safety interlocks on door and wheelie bin • Easy to use and maintain
- Ready for use with 13A plug • Bin full indicator • Tough, durable, hygienic stainless steel construction


The IP700 offers all the benefits of other Impactor models but with the added convenience of compacting directly into the operator's own 240 litre wheelie bin. This means there are no bags or trolleys to handle, saving valuable staff time, optimising waste handling efficiency and,

ultimately, increasing kitchen productivity. The IP700 also gives operators the option of using different bins as part of a waste segregation scheme.

Technical Specification

For shipping specifications please see pages 25-26

| | IP700 |
|-----------------------------------|--------------------------------------|
| Average Compacted Weight | 40-45kg |
| Compaction Force & Ratio (approx) | 1000kgf 5:1 |
| Cycle Time | 17 seconds |
| Motor | 0.75kW |
| Voltages | 240-1-50 or 220-1-60 |
| Controls | 24V |
| Fuse Ratings | 13A |
| Electrical Connection | to adjacent 13A socket |
| Safety | interlocks on bin & door |
| Indicator lights | machine run, bin full |
| Optional equipment | deck feet for shipboard installation |

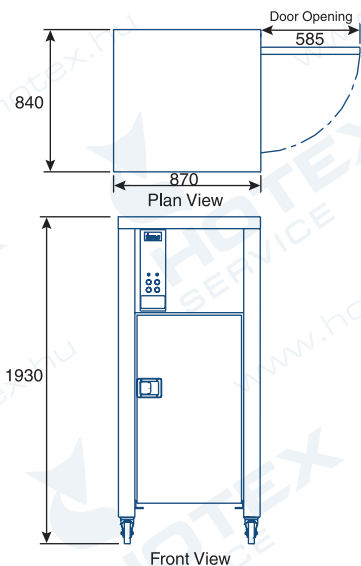

Dimensions in mm
2.5m cable supplied

Eurobin Compactor



IP1100

- Ready for use – 13A plug • Reduces waste volume by up to 80%
- Can be sited outdoors • Safety interlock • No bags to handle • Tough, durable, hygienic
- Compacts waste into existing 1100 litre bins • Easy to use and maintain


All commercial catering and industrial establishments generate large amounts of dry waste. Cartons, tins, bottles and packaging can constitute a safety hazard unless they are effectively removed, processed and stored. That is why the IP1100 is an essential part of any waste management solution. This tough, durable, highly-efficient

machine quickly reduces the volume of dry waste by up to 80%. Users see an immediate return on their investment. The benefits include a substantial reduction in waste collection costs, saving in valuable storage space and, even more importantly, significant savings in the time spent by staff handling waste management.

Technical Specification

For shipping specifications please see pages 25-26

| | IP1100 Eurobin Compactor |
|-------------------------------------|--------------------------|
| Compaction Force & Ratio (approx) | 3000kgf 5:1 |
| Machine Dimensions W x D x H (mm) | 1375 x 1355 x 1970 |
| Transport Dimensions W x D x H (mm) | 1375 x 1000 x 1430 |
| Weight | 285kg |
| Voltages | 220/240-1-50 400-3-50 |
| Fuse - 3 phase | 3 x 16A |
| Motor | 1.5kW |
| Operating Temperature | 0°C to +40°C |

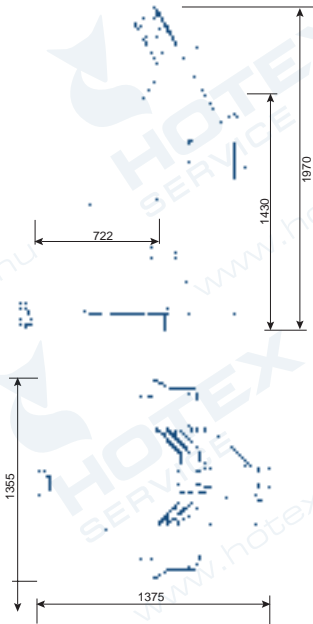

Dimensions in mm
2.5m cable supplied