


M VERSION



Mod.
044/054

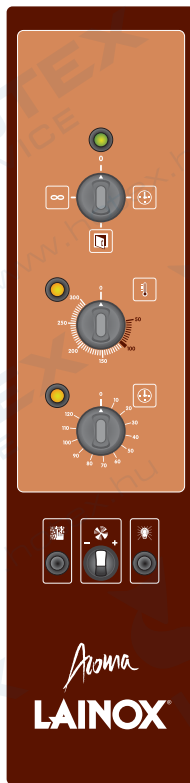

Mod.
064/074
084/104
156

Electromechanical, with selector for timed, continuous, open door cooling functioning - Two speed fan; normal/reduced (**excluding mod. 044/054**) - Autoreverse (automatic inversion of fan rotation) - Manual humidifier - Manual cavity vent - Lights - Double-glass opening door.

OPTIONAL:
- Hand shower

COOKING MODE

- Convection 70 - 300°C

OPERATING MODES

- Continuous
- Timed

S VERSION



Mod.
044/054



Mod.
064/074
084/104
156

99 program electronics, with automatic 4-cycle sequence - Dedicated key for managing 4 cycles, with displaying LED - Alphanumerical displays - Pre-set recipes - Direct access key to programs and recipes - Self-diagnosis - Autoreverse (automatic inversion of fan rotation) - Lights - **Two speed fan; normal/reduced** - Power reduction - Manual or automatic controlled humidifier - Automatic vent with pre-opening control - Double-glass opening door - Standard semi-automatic washing program - USB interface for software update, cooking programs and HACCP data download

OPTIONAL:

- Hand shower
- Multipoint core probe - Ø 3 mm. (*To be requested when ordering oven*)
- Automatic washing system AWS (*To be requested when ordering oven*) - equipped with 1 cleanser tank DL 010 (10 lt.)

OPERATING MODES

- Manual
- Programmable with automatic cooking sequence
- Automatic with 22 pre-set recipes
- With core probe
- Timed

STEAM MANAGEMENT

- With instantaneous generation at start of cooking with manual time setting in seconds
- With continuous steam generation setting
- With manual setting of humidity percentage (the humidifier cannot be used manually if not set)



Mod.
044/054
064/074
084/104
156

Programmable electronics with liquid crystal display (LCD) "Touch Screen" - Automatic AAC cooking system - Programmable with 400 cooking programs - Humidity regulation - Fast-Dry: Rapid humidity evacuation system - 6-speed fan (**excluding mod. 044/054 with only two speed fan**) - Power reduction - Autoreverse (automatic inversion of direction of fan rotation) - Multiple-point core probe - Controls for: humidifier, quick cavity cooling with door open, cavity lights, manual vent control - USB interface for software update, cooking programs and HACCP data download

OPERATING MODES

- Manual
- Automatic AAC - Aroma Automatic Cooking
- Automatic EXTRA
- Programmable with possibility of storing 400 cooking programs in automatic sequence (up to 15 cycles)
- With automatic delayed start
- With core probe
- Timed

STEAM MANAGEMENT

- With instantaneous generation at start of cooking with manual time setting in seconds
- With continuous steam generation setting
- With manual setting of humidity percentage (the humidifier cannot be used manually if not set)

OPTIONAL:

- Multipoint core probe - Ø 3 mm. *(To be requested when ordering oven)*
- Automatic washing system AWS *(To be requested when ordering oven)* - equipped with 1 cleanser tank DL 010 (10 lt.)