

04 Series Trough Food Waste Disposers



Single Trough

Double Trough

- Choice of 1.1, 2.2 and 4.0kW models
- Ideal for use in large, busy kitchens
- Easily integrated with clean-up/dishwasher schemes
- Single or double entry models
- Allows access by several operators
- Improves kitchen productivity

When the pressure is really on in the kitchen, a number of staff may want access to the food waste disposer at the same time. With an 04 Series Trough Unit, it's no problem. Typically, a trough unit is situated alongside a tray conveyor operating between a clearing area and a dishwasher. Waste is emptied into the trough and crockery replaced on

to the conveyor. This optimises the efficiency of both units and prevents waste blocking the dishwasher filter. A scrapping trough, maximum length of 3m, must be connected to the single trough unit. A double trough unit is centrally located between two troughs and recommended for use where the overall scrapping trough length is between three and six metres.

Technical Specification

For shipping specifications please see pages 25-26

FEATURES AND OPTIONS


	Trough Units	
1.1, 2.2, 4.0kW versions	✓	
Automatic water control	✓	
Water flow regulator	✓	
Class A Air Break	-	
Motor Controller	Wall Mounted	
Remote button box	-	
Motor reverse	Push-button	
Overload protection	Thermal	
Safety interlocked baffle	✓	
Cutlery saver baffle	-	
Magnetic cutlery saver	○	
Hopper rim	-	
Low-load cut-out	-	
Rinse-through	-	
Seal failure protection	-	
Machine Status indicator	-	

✓ = Standard ○ = Option - = Not Applicable

Model	DMin	DMax	F	L	U	V	W
904ST & 904DT	800	905	252	508	551	302	276
1204ST & 1204 DT	850	900	298	528	574	349	323
1604ST & 1604DT	850	900	298	528	574	349	323

Dimensions in mm
2.5m cable supplied

Single Trough

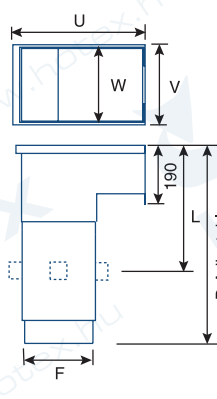

Double Trough

