# Affordable Durability Great Versatility

#### The Menumaster® MLD510/UMLD510

Ideal for light volume sites, this stainless steel unit features an easy-to-use touch controls for fast, convenient service. Ideal for self-serve locations, this oven is the perfect replacement for home or domestic ovens in foodservice locations.ovens in foodservice locations.

#### Key Features

- Certified for commercial use.
- 1000 Watts of power for fast heating.
- 1.2 cubic foot capacity easily accommodates prepackaged foods, single servings or up to a 13" platter.
- Stainless steel interior and exterior for easy cleaning.
- 3 cooking stages and 4 power levels for cooking flexibility.
- See-through door and lighted interior for easy monitoring of food without opening the door.
- Durable construction for years of commercial foodservice use.
- Global service network provides on-going product support.
- Full one year warranty including parts, labor and travel and a limited three year warranty on the magnetron tube part only.

# *MLD510/UMLD510*

#### 1000 Watts

COMMERCIAL MICROWAVE OVEN



### A Dependable and Cost-Effective Way to ...

- Enjoy superior performance and food quality
- Increase food sales and profits
- Improve efficiency of your foodservice business

#### Maximize Your Profits

The versatile MLD510/UMLD510 is the perfect choice for selfserve sites or heating a variety of entrees or desserts. It's designed for use in:

**Break Areas** 

Kiosks

Cafeterias

And More!

For more information about any of our fine commercial microwave ovens, visit our web site at www.amanacommercial.com.

Form #MCO0502 ©2005 Amana Commercial Products Printed in the USA.



MENUMASTER

## *MLD510/UMLD510*

## 1000 Watts


#### COMMERCIAL MICROWAVE OVEN

(640 mm x 510 mm x 400 mm)

#### SPECIFICATIONS

Configuration	Countertop	Cabinet	Exterior L Dimensions			Usable Interior Dimensions	
Control System	Touch	Height	13-1/2"	(344 mm)	8-3/4"	(221 mm)	
Programmable Control Pads	10	Width	22"	(560 mm)	14-1/2"	(369 mm)	
Total Programmable Settings	20	Depth (overall with handle)	19"	(483 mm)	15-3/4"	(400 mm)	
Cooking Timer 20:00, Full Power (60:00 variable power)		Depth (door open 90°)	32-3/4" (835 mm)				
Power Levels	4	Usable Cavity Space	1.2 cubic ft. (34 L)				
Defrost	Yes	Outercase Finish	Stainless Steel				
Time Entry Option	Yes	Cavity Interior Finish	Stainless steel				
Microwave Distribution System	Rotating Antenna	Electrical Characteristics	_	MLD510 UMLD510			
Magnetron(s)	x 1	Power Consumption	1	1500 W, 7.0A	15	00 W, 7.0 A	
Display	VFD	Power Output		1000 W*	90	1000 W*	
Stage Cooking	3 stages	Power Source	230 V, 50 Hz, 16 A 230 V, 50 Hz, 13 A single phase single phase				
Interior Light	Yes					5 .	
Door Opening System	Handle	Plug Configuration	CEE 7/7 "Schuko" BS1363A		BS1363A		
Signal	End of cycle	1 . M.		$\odot$			
Multiple Quantity Setting	Yes, X2	Frequency	2450 MHz				
+30 Second Pad	Yes	Power Cord Length	4.75′				
Warranty	One Year Full, Three Year Limited on Magnetron	Weight/Shipping Information			100	10	
		Net Weight		41 lbs. (19 kg)			
		Approximate Shipping Wt.		47 lbs. (22 kg)			
		Shipping Box Size	25	25 1/4" W x 20" D x 15 3/4" H			

Amana's continuing commitment to quality products may mean a change in specification without notice. \*Microwave output ratings based on IEC 705 test. Certified to IEC60335-2-90 meeting particular requirements for commercial microwave ovens

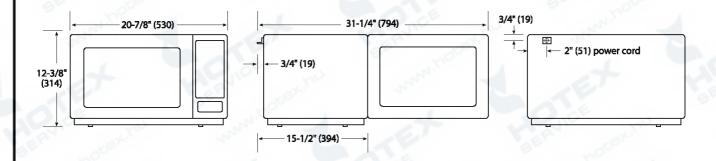

For more information about any of our fine commercial microwave ovens, visit our web site at www.amanacommercial.com.

Form #MC00502 ©2005 Amana Commercial Product Printed in the USA.



MENUMASTER\*