



CONSERVAZIONE
CONSERVATION

Tecnomac®

BanControl®



BanControl®

Tecnomac®







CARATTERISTICHE TECNICHE GENERALI

Banchi refrigerati: banco da lavoro refrigerato con sbrinatorio automatico temporizzato. Costruzione interna ed esterna in acciaio inox, isolamento ottenuto per iniezione di poliuretano ad alta densità. Gruppo compressore di tipo ermetico incorporato con condensazione ad aria. Termostato/termometro digitale per la programmazione e la visualizzazione della temperatura.

TECHNICAL CHARACTERISTICS

Refrigerated workbenches with automatic defrosting. Inside and outside body in stainless steel. Insulation by means of injected high density polyurethane. Integrated condensing unit with hermetic compressor. Electronic digital thermostat/thermometer for pre-setting and read-out of temperature.

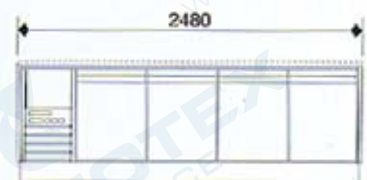

DATI TECNICI

TBF: BANCHI REFRIGERATI -2°C + +15°C

TECHNICAL DATA

REFRIGERATED WORKBENCHES -2°C + +15°C

	TBF 2	TBF 3	TBF 4
DIMENSIONI/DIMENSIONS	LHP 1440 • 850 • 800	LHP 1960 • 850 • 800	LHP 2480 • 850 • 800
PESO NETTO KG NET WEIGHT KG	105	150	190
CAPACITÀ LT./CAPACITY LT.	310	465	620
N. PORTE/DOORS N.	2	3	4
ALIM. EL. MONOFASE POWER SUPPLY	230V/50Hz	230V/50Hz	230V/50Hz
POTENZA HP/POWER HP ASSORBIMENTO/ABSORPTION	1/5 300 W	1/5 300 W	1/4 400 W
POT. FRIGOR. A TEMP. EVAP. -10 °C COOL. POWER AT -10 °C EVAP. TEMP.	260 W	260 W	460 W

ALTRI DATI

TBF - Quadro comandi composto da: Interruttore generale - Termostato elettronico

OTHER CHARACTERISTICS

TBF - Main on/off switch - Electronic thermostat

Accessori in dotazione: piani d'appoggio interni costituiti da 2 griglie plastificate e 2 coppie di guide per sportello o in alternativa 4 coppie di guide per sportello. Bacinella raccogli-condensa.

Optional: Ulteriori guide e ripiani - Alzatine posteriori.

Standard equipment: 2 plasticized grids and 2 couples of guides for each door or 4 pairs of guides for each door.

Condensing drip tray.

Optional: Further guides and shelves.

I dati tecnici sono indicativi e possono essere modificati senza preavviso. Castel Mac reserves the right of making both technical and aesthetic changes to the machines without notice.

Castel MAC SpA

31033 CASTELFRANCO VENETO (TV) ITALY - Via del Lavoro, 9

Tel. +39.0423.738451/738311 - Fax +39.0423.722811

E-mail: tecnomac@castelmac.it

http://www.castelmac.it