

Modular Super-Flake Ice Machine up to 2500 Kg

Other models in this range:
MF 46 - MF 56 - MF 58 Split
MF 66 - MF 68 Split
MF 86



Features MF88Split


- Modular Superflake ice machine, production up to 2500 kg in 24 hours
- Split unit, supplied with evaporator only, needs to be connected to remote condensing unit or central cooling system (low temperature)
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electromechanical control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings
- Double protection (electronic rotation sensor and drive coupling) on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Ice level thermostat for machine shut down
- Stainless steel side panels in scotch-brite finish, rounded corners for enhanced ease of cleaning and aesthetics
- Side panels are removable on all four sides to ease maintenance and after-sales service operations
- ABS plastic top cover
- Reduced height to ease installation.

Optional Features (special order):

- UV lamp for bacterial control.
- Anti-scale, anti-algae water filtration system
- KICMAREXT0001 ice chute extension 90cm
- KICMARDOUBL02 double ice chute 65cm
- Infrared ice sensor
- ON/OFF/24h manual switch
- KITTIMERSET01 weekly timer



ABS plastic top cover




MF 88Split+B1350
(sold separately)




Standard Ice shut included




MF 88Split+B2250
(sold separately)



MF 88Split+B3200/4600
(sold separately)



MF 88Split+ITS2250/ITS3250
(sold separately)



MF 88Split+ICS2/ICS3
(sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions

MF 88 SPLIT Technologies



	10°: 10°C		21°: 15°C		
	[kg]	[lbs]	[kg]	[lbs]	
MF 88 Split	2500	5512	2250	4960	[WxDxH mm] 540x780x1140-1255
					[WxDxH inches] 21 1/4 x 30 1/2 x 44 7/8-49 5/16
					[v/Hz/ph] 400/50/3N
					R 404 A



Humidity 15%

Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.


Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Super-Flake Ice Machine up to 2500 Kg

Other models in this range:
MF 46 - MF 56 - MF 58 Split
MF 66 - MF 68 Split
MF 86

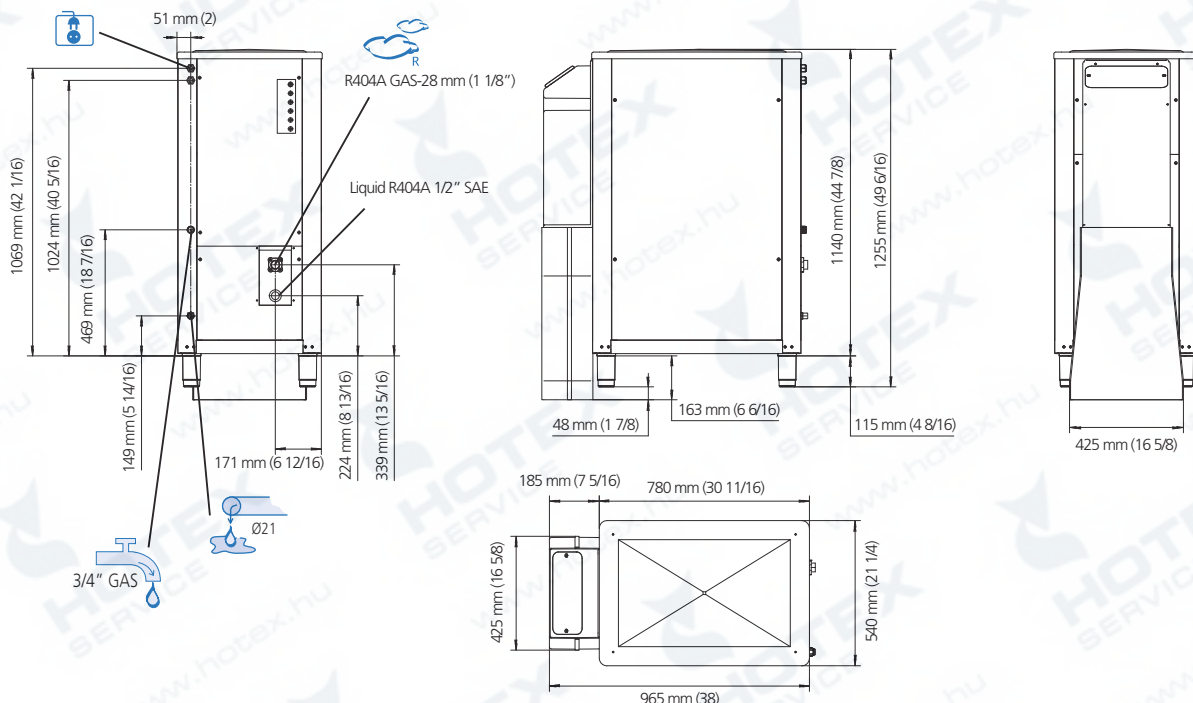

Fitted with R404A expansion valve, solenoid valve on liquid line, heat exchanger, pressure regulating valve, cover and ice chute in ABS, electrical control panel with protections.

Complet de vanne solénoïde liquide, échangeur de chaleur, détendeur R404a, vanne de régulation pression, bec verseur, couvercle et goulotte en ABS, tableau électrique avec protections.

Kältemittel R 404A, ausgestattet mit Expansionsventil, Magnetventil, Wärmetauscher, Druckventil. Auswurföffnung und Auswurfschacht aus ABS.

Equipado de válvula expansión termostática R404a, solenoide línea líquido, intercambiador de calor, válvula de regulación de presión, boca, tapa y tubo descarga hielo de plástico ABS, cuadro eléctrico con protecciones.

Completo di valvola termostatica R404a, solenoide linea liquido, scambiatore di calore, valvola regolatrice di pressione, bocchetta, coperchio e tubo scarico ghiaccio in ABS, quadro elettrico di comando con protezioni.

MF 88 SPLIT

	50° 10°	60° 15°	70° 21°	90° 32°	
°F	10°	50°	60°	70°	90°
°C	10°	50°	60°	70°	90°
kg	2500	2250	1950	1500	
lbs	5512	4960	4299	3307	

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	R404A (Standard Asercom: T.ev: -25°C/-13°F; T. cond: +45°C/+113°F)				
	[W]	[Btu/h]	[W]	[A]	[kg] [lbs]
MF 88 Split	7100	24230	250	1.2	223 491 241 530

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific
Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China
Scotsman Ice Systems (Shanghai)
Room 2503, Building 2
20 Xuhong Middle Road, Xuhui District
Shanghai China 200235
Main line: (+86) 21 61313200
Fax: (+86) 21 61313330
scotsman.shanghai@scotsman-china.com

Middle East & N. Africa
Scotsman Ice Systems Dubai Office
P.O. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax: (+97) 16-5773-165
scotsman@eim.ae

South Africa
Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
P.O. Box 44 - Riverclub 2149
Ph: (+27) 11-7898400
Fax: (+27) 11-7898411
scotsman@telkomsa.net

USA, Canada, Latin America
Scotsman Ice Systems USA
775 Corporate Woods Parkway
Vernon Hills, IL 60061
Ph: (+1) 847 215-4550
Fax: (+1) 847 913-9844
customer.service@scotsman-ice.com