


Modular Flake-Ice Machine up to 120 Kg/24h.




ABS plastic top cover



Stainless Steel



Electronic Controls




MF 26 + B193
(sold separately)



MF 26 + B393 + KBT103
(sold separately)



MF 26 + B393 + KBT103
(sold separately)



MF 26 + RB400
(sold separately)



Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.

MF 26 Technologies



	10°: 10°C [kg] [lbs]		21°: 15°C [kg] [lbs]		
MF 26 AS	120	264	110	242	[WxDxH mm] 563x536x525
MF 26 WS	120	264	106	234	[WxDxH inches] 223/16" x 211/8" x 205/8"
					[v/Hz/ph] 230/50/1 also available in 230/60/1
					R 134 a

This product qualifies for the following listings:



Humidity 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

2 Years Warranty

Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.


Scotsman®

Ice Systems

Modular Flake-Ice Machine up to 120 Kg/24h.

MF 26

Other models in this range:
MF 36

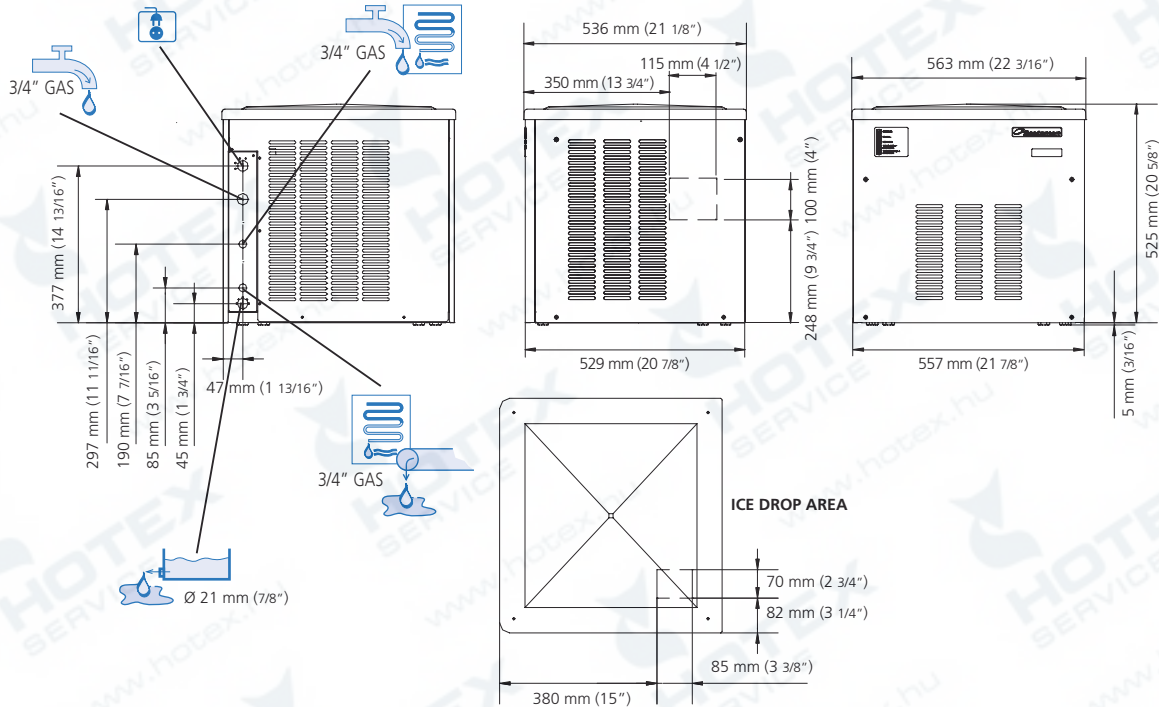

MF 26 AIR COOLED

°C / °F	°C / °F				kg
	50° / 120°	60° / 145°	70° / 165°	90° / 195°	
10° / 50°	120	116	112	104	kg
50°	264	256	247	229	lbs
21° / 70°	114	110	106	98	kg
70°	251	242	234	216	lbs
32° / 90°	103	99	95	87	kg
90°	227	218	209	192	lbs
38° / 100	96	92	88	80	kg
100	212	203	194	176	lbs

MF 26 WATER COOLED

°C / °F	°C / °F				kg
	50° / 120°	60° / 145°	70° / 165°	90° / 195°	
10° / 50°	120	116	112	104	kg
50°	264	256	247	229	lbs
21° / 70°	110	106	102	94	kg
70°	242	234	225	207	lbs
32° / 90°	105	101	97	89	kg
90°	231	223	214	196	lbs
38° / 100	103	99	95	87	kg
100	227	218	209	192	lbs



Minimum

10°C (50°F)

Maximum

40°C (104°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR
14 psi

5 BAR
70 psi



(in 230/50/1 specs)



	Icon	[Btu/h]	[W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg] [lbs]	[kg] [lbs]
MF 26 AS		4090	1200	3 x 1,5	500	10 A	10.4	4	1	45 99	52 115
MF 26 WS		4090	1200	3 x 1,5	500	10 A	11.7	29	7,6	45 99	52 115

Scotsman®
The smart choice in ice.™

CONTACT POINTS:

Europe

Scotsman Europe-Frimont S.p.A.
Via Puccini, 22
20010 Pogliano (Milano) Italy
Ph: (+39) 02-93960208
Fax: (+39) 02-93960201
scotsman.europe@frimont.it

Asia and Pacific

Scotsman Ice Systems-Frimont S.p.A. (R.O.)
627A Aljunied Road-#04-04 Biztech Centre
Singapore 389842
Ph: (+65) 6738 5393
Fax: (+65) 6738 1959
scotsice@singnet.com.sg

China

Scotsman Ice Systems (Shanghai)
Shanghai Shiye Mansion Room 15A
18 Caohui North Road
Xuhui District - Shanghai, PRC
Ph: (+86) 21-64279162/3/4/5
Fax (+86) 21-64279160
scotsman.shanghai@scotsman-china.com

Middle East & N. Africa

Scotsman Ice Systems Dubai Office
P.o. Box 21648
Sharjah - U.A.E.
Ph: (+97) 16-5773-164
Fax (+97) 16-5773-165
scotsman@eim.ae

South Africa

Scotsman Ice Systems SA (PTY) Ltd.
10, Rhodes Street - Kensington B
P.o. Box 44 - Riverclub 2149
Ph: (+27) 11-7898400
Fax (+27) 11-7898411
scotsman@telkomsa.net

USA, Canada, Latin America

Scotsman Ice Systems USA
775 Corporate Woods Parkway
Vernon Hills, IL 60061
Ph: (+1) 847 215-4550
Fax (+1) 847 913-9844
customerservice@scotsman-ice.com

6/2009